


FLAME TECH

HEAVY DUTY & MEDIUM
DUTY REGULATOR

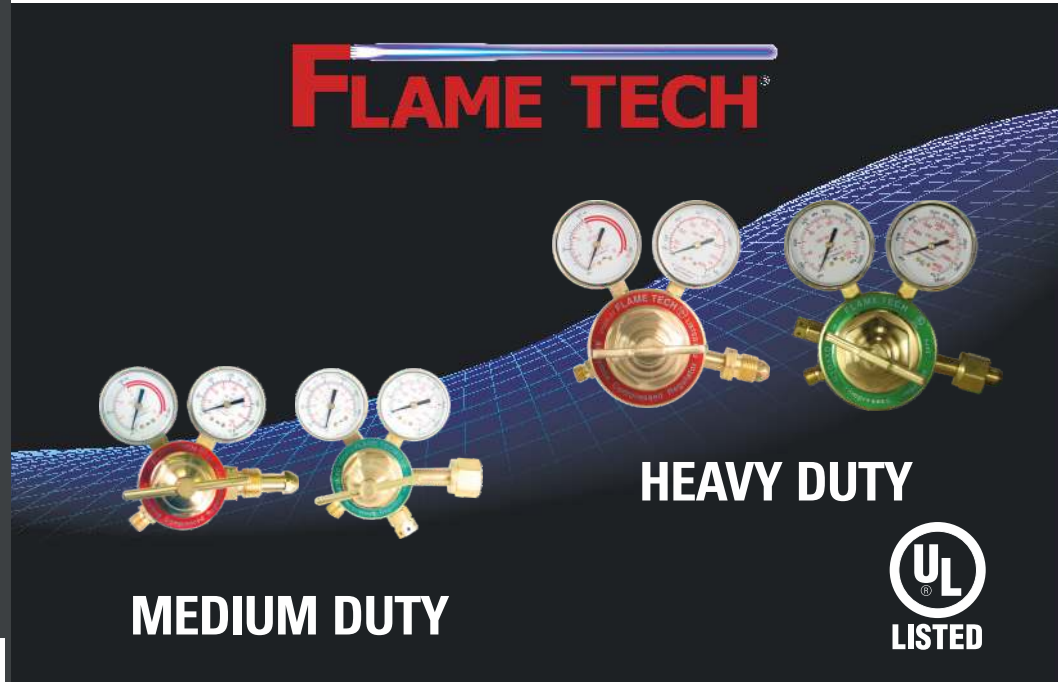

PRODUCT

Features:

- + Forged brass body & bonnet for maximum strength
- + Oxygen with safety relief valve for safe operation
- + Sintered metal inlet filter to trap impurities
- + Easy to read dual scale gauges with hardy acrylic screw-on lens

HEAVY DUTY REGULATORS

Sr. No.	Gas	Inlet Pressure	Outlet Pressure	BSP Partcode	BSP / UNF Partcode	CGA Partcode
1	Acetylene	25bar / 360psi	1.5bar / 22psi	VHAR21MB	VHAR21MBU	VHAR21MU
2	Propane	25bar / 360psi	2.5bar / 37psi	On Request	VHFR21MBU	VHFR21CGA
3	Oxygen	230bar / 3335psi	10bar / 145psi	VHOR21MB	VHOR21MBU	VHOR21CGA

MEDIUM DUTY REGULATORS

Sr. No.	Gas	Inlet Pressure	Outlet Pressure	BSP Partcode	BSP / UNF Partcode	CGA Partcode
1	Acetylene	25bar / 360psi	1.5bar / 22psi	VMAR22MB	VMAR22MBU	VMAR22MU
2	Propane	25bar / 360psi	2.5bar / 37psi	On Request	VMFR22MBU	VMFR22CGA
3	Oxygen	230bar / 3335psi	10bar / 145psi	VMOR22MB	VMOR22MBU	VHAR22CGA

FLAME TECH

REGULATORS AND FLOWMETERS



PRODUCT

*Part Code On Request

Features:

- + Economy style combination regulator and flowmeter in one unit
- + Dual scale gauge with impact resistant polycarbonate lens for durability
- + Compact lightweight construction
- + Designed for MIG & TIG applications providing accurate regulation of gas flow
- + Preset pressure output at 50 PSI, machined brass body, polycarbonate flow tube and outer cover are impact resistant for maximum durability



Specification

- + Outlet 5/8"–18RH Female
- + Flow Range 10 - 60 SCFH
- + Inlet Connection: 1/4" NPT Male
- + Max. Inlet Pressure: 50PSIG
- + Not for Cylinder Use.



Specification

- + Outlet 5/8"–18RH Female
- + Flow Range 10 - 60 SCFH
- + Inlet Pressure - 200bar
- + Inlet Connection - CGA / BSP




Specification

- + 0-60 SCFH Flow
- + Outlet fitting: 5/8"-18 RH Female CGA "B"
- + Inlet Pressure - 200bar
- + Inlet Connection - CGA / BSP

FLAME TECH

INERT GAS REGULATORS

FLAME TECH

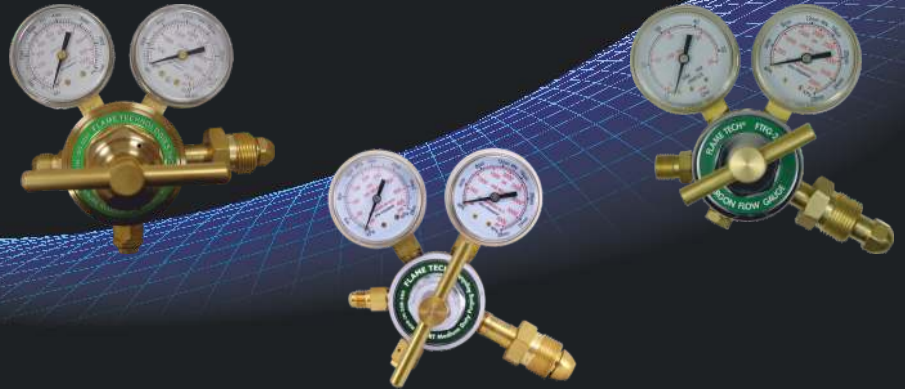

PRODUCT



Inert Gas High Pressure Regulators
HPPR-IN-700-580

BENEFITS

- + Inlet Pressure: 3,000 PSI
- + Outlet Pressure: 50–700 PSI
- + 2" Guages
- + Inlet: BSP / CGA Connections
- + Outlet: BSP / UNF Connections
- + Piston Style Regulator



Inert Gas Medium Duty
MDR-IN-350-580

BENEFITS

- + Inlet Pressure: 3,000 PSI
- + Outlet Pressure: 15–350 PSI
- + 2" Guages
- + Inlet: BSP / CGA Connections
- + Outlet: BSP / UNF Connections



Argon Flow Gauge Regulator
FTFG-25-AR

BENEFITS

- + Safety relief valve to protect equipment
- + Forged brass body
- + Sintered metal inlet filter to trap impurities
- + Inlet connections: CGA / BSP
- + Use for MIG/TIG operations
- + Designed for small to medium operations, with flow of 8–45 SCFH